



# CMET Series

## Metallized Polyester Film Capacitors (Axial Lead)

**TRIGON**  
COMPONENTS

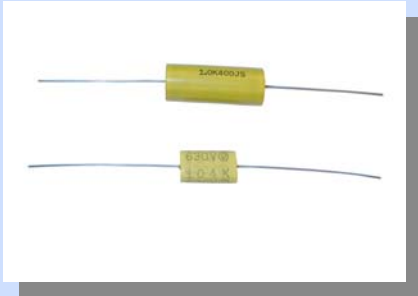

### Configuration

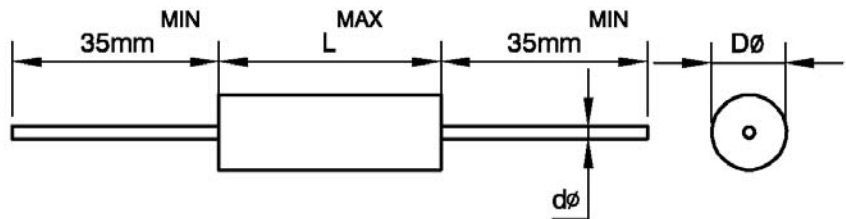

## FEATURES

- Non-inductive construction.
- Good solderability.
- Self-healing property.
- High stability of capacitance and of reliability.
- RoHS Compliant.

## APPLICATIONS

- They are ideal for telecommunication equipment's, data processing industrial instruments, automatic control systems and other general electronic equipment's.

## ORDERING CODE

**CMET 223 J 101 A 000 T**  
(1) (2) (3) (4) (5) (6) (7)

- (1) Metallized Polyester Film Capacitor for CMET (Axial Lead)
- (2) Capacitance Code
- (3) Tolerance Code
- (4) Rated Voltage Code
- (5) Style
- (6) Lead to Lead Distance
- (7) Package

※ Please refer to complete Ordering Code Document (CPMx-Ord) for more ordering options.

### Specification:

Item	Performance Characteristics
Operating Temperature	-40°C ~ +85°C
Capacitance Range	0.01 $\mu$ F ~ 18.0 $\mu$ F
Capacitance Tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K), $\pm 20\%$ (M).
Rated Voltage	100, 250, 400, 630VDC
Dissipation Factor	1.0% MAX. at 1KHz, 25°C
Testing Voltage	160% of RV for 60sec.
Insulation Resistance	$C \leq 0.33 \mu F$ and $RV \leq 100VDC$ , $\geq 15,000 M\Omega$ (at 25°C) $C > 0.33 \mu F$ and $RV \leq 100VDC$ , $\geq 5,000 M\Omega \cdot \mu F$ $C \leq 0.33 \mu F$ and $RV > 100VDC$ , $\geq 30,000 M\Omega \cdot \mu F$ $C > 0.33 \mu F$ and $RV > 100VDC$ , $\geq 10,000 M\Omega \cdot \mu F$

Capacitor

